

AD-A054 259

FOREIGN TECHNOLOGY DIV WRIGHT-PATTERSON AFB OHIO
DEVICE FOR REMOVING HARMFUL GASES AND DUST FROM INDUSTRIAL GASE--ETC(U)
DEC 77 J ALEKSANDROWICZ, W BIEDA, E GORLICH

F/G 13/2

UNCLASSIFIED


FTD-ID(RS)T-2024-77

NL

| OF |
AD
A064259



END
DATE
FILMED
6-78
DDC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

①

AD-A054259


FOREIGN TECHNOLOGY DIVISION




DEVICE FOR REMOVING HARMFUL GASES AND DUST FROM
INDUSTRIAL GASES AND FOR IMPROVING ATMOSPHERIC
AND GROUND CONDITIONS AROUND INDUSTRIAL SITES

by

J. Aleksandrowicz,
W. Bieda, et al.



Approved for public release;
distribution unlimited.



EDITED TRANSLATION

FTD-ID(RS)T-2024-77

5 December 1977

MICROFICHE NR: *7AD-77-C-001515*

DEVICE FOR REMOVING HARMFUL GASES AND DUST FROM
INDUSTRIAL GASES AND FOR IMPROVING ATMOSPHERIC
AND GROUND CONDITIONS AROUND INDUSTRIAL SITES

By: J. Aleksandrowicz, W. Bieda, et al.

English pages: 4

Source: Polish Patent No. 88183, 15 March 1977,
pp. 1-2.

Country of origin: Poland

Translated by: Dale A. Bostad

Requester: FTD/PHE

Approved for public release; distribution
unlimited.

ACCESSION NO.	
RYE	WHITE SECTION <input checked="" type="checkbox"/>
WJG	LEFT SECTION <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
INTL	AVAIL. DOC/OP SPECIAL
<i>A</i>	

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION
FOREIGN TECHNOLOGY DIVISION
WP.AFB, OHIO.

FTD -ID(RS)T-2024-77

Date 5 Dec 19 77

DEVICE FOR REMOVING HARMFUL GASES AND DUST FROM INDUSTRIAL
GASES AND FOR IMPROVING ATMOSPHERIC AND GROUND CONDITIONS
AROUND INDUSTRIAL SITES

Provisional Patent Specifications, Patent Office of the Polish
People's Republic

Inventors: Julian Aleksandrowicz, Wladyslaw Bieda, Edward
Gorlich, Zezislav Liskiewicz, Jerzy Warecki-Niemcewicz

The invention is a device for removing harmful gases and
dust from industrial gases and for improving atmospheric and
ground conditions around industrial sites.


Bearing patent specification number 71,594, this device
for purifying chimney smoke of toxic gases and dust dissovable
in water has a pump that draws water from any kind of tank or
precipitation tank and pumps it into a collector. The collector
is connected to "n" dispersion nozzles arranged at a tangent
or radially to the circumference of the chimney top. Water
vapor created by the nozzles moistens the fumes and at the same
time directs them against a metal screeen into the smoke discharge
channel. The smoke discharge channel is a space bounded by a
jacket, the channel unit, and an upper cowl. The smoke
discharge channel is divided into two chambers by a metal
screen. The metal screen and the wall are moistened
gravitationally by water supplied from the collector through a
flange and water main to a tubular ring that is equipped with
discharge openings.

The shortcoming of the device described is that it can only be used in chimneys in which the temperature of the smoke is not greater than 200°C . The water vapor precipitates a sediment from the fumes which, exactly like limestone precipitated from water, settles on the metal screen and causes blocking of the flow.

The intended purpose of the invention is to develop a device that can be used to remove harmful gases and dust at a temperature of up to 800°C from industrial gases and to improve the atmospheric and ground conditions around industrial sites. This goal has been obtained by inserting a gas probe into the chimney ; it is connected through a fumes analyzer, gas chromatograph, and electric transducers to an automatic control panel. The automatic control panel is connected to a servomotor which in turn is connected by a pipe to a pressurized tank equipped with an electrically controlled valve; within the tank there is a chemical solution. The pipe is outfitted with nozzles and is placed in the chimney draft.

The merit of the device is that it neutralizes harmful gases and at the same time compensates for chemical elements lacking in a given environment, a fact which has great significance for protecting humans, animals, and plants.

The invention is shown in schematic form in the illustration.

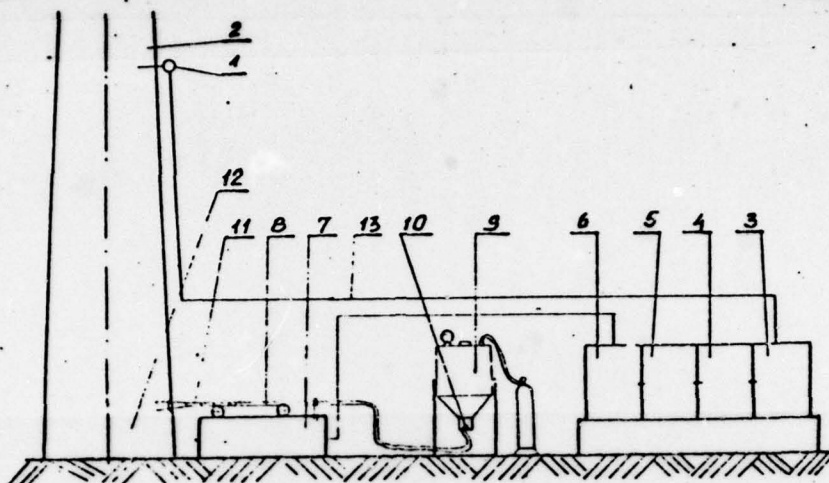

Schematic Diagram

The device has a gas probe(1) inserted in the mouth of the chimney (2) and is connected through fumes analyzer(3), gas chromatograph (4), and electric transducers (5) to automatic control panel (6). Automatic control panel (6) is connected to servomotor (7), which is connected by pipe (8) to pressurized tank (9) that is equipped with an electrically controlled valve (10). The tank contains a chemical solution. Pipe (8) with nozzles (11) are placed in the chimney draft (12).

The operating principle of this device is the following: gas probe (1) draws in the emitted gases that are directed by pipe (13) first of all to the fumes analyzer (3), then through gas chromatograph(4) to electric transducers (5). The pulses measuring the gas concentrations are transmitted by converters(5) to automatic control panel (6). Relays located in panel (6) activate electric valve (10) and allow

the chemical solution to flow from tank (9) into pipe (8). The solution of chemical elements is added depending on the chemical composition of the emitted gases and on the chemical elements lacking in a given environment. As a result of the neutralization of the emitted gases inert salts in the form of nitrates, phosphates, and other elements dissovable in water are created and they are used for fertilizing the ground. Based on investigations of the soil and atmosphere of the specified environment the amount and kind of chemical elements lacking in a given environment is determined every time.

Patent Specifications

The device for removing harmful gases and dust from industrial gases and for improving atmospheric and ground conditions around industrial sites is equipped with nozzles and is characterized by the fact that it has gas probe (1) placed in chimney (2) and is connected through fumes analyzer (3), gas chromatograph(4) and electric transducers (5) to automatic control panel (6); this in turn is connected to servomotor (7), connected through pipe (8) to nozzleš (11), which are inserted in chimney draft (12) and to pressurized tank (9) containing a chemical solution; the tank is equipped with an electrically controlled valve (10).

DISTRIBUTION LIST

DISTRIBUTION DIRECT TO RECIPIENT

ORGANIZATION	MICROFICHE	ORGANIZATION	MICROFICHE
A205 DMATC	1	E053 AF/INAKA	1
A210 DMAAC	2	E017 AF/RDXTR-W	1
B344 DIA/RDS-3C	8	E404 AEDC	1
C043 USAMIA	1	E408 AFWL	1
C509 BALLISTIC RES LABS	1	E410 ADTC	1
C510 AIR MOBILITY R&D	1	E413 ESD	2
LAB/FIO		FTD	
C513 PICATINNY ARSENAL	1	CCN	1
C535 AVIATION SYS COMD	1	ETID	3
		NIA/PHS	1
C591 FSTC	5	NICD	5
C619 MIA REDSTONE	1		
D008 NISC	1		
H300 USAICE (USAREUR)	1		
P005 ERDA	1		
P055 CIA/CRS/ADD/SD	1		
NAVORDSTA (50L)	1		
NASA/KSI	1		
AFIT/LD	1		